

CPX4



ULTRA PORTABLE LCD PROJECTOR



Combining stunning features with powerful performance in a lightweight and compact design, the CPX4 is the ultimate portable projector for the mobile business professional. With our new Easy Pass Code Connection, CPX4 also delivers greater ease in wireless networking.

- XGA
- 2000 Lumens
- Light weight 1.89Kg
- PC-less presentations
- Quick wireless network connection with Easy Pass Code Connection
- Auto vertical keystone correction
- Quick-start (3 seconds)
- 29dB (Whisper Mode)
- Input Source Naming
- Blackboard or Whiteboard Modes
- My Button
- Anti Theft features:
 - PIN-Lock
 - MyScreen Lock
 - Transition Detector



HITACHI
Inspire the Next

CPX4 Technical specifications

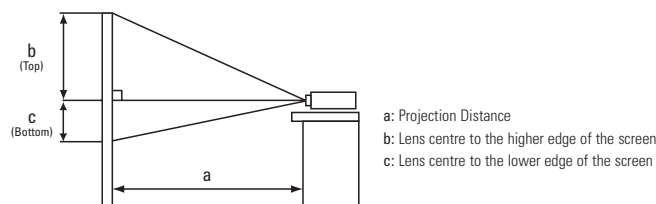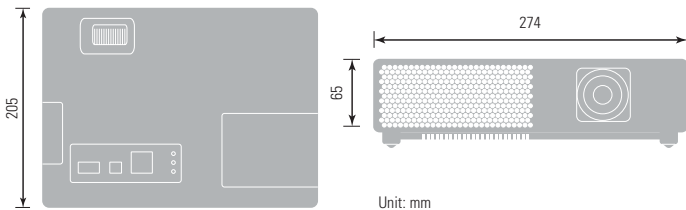

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
30"	0.8	0.9	39.0	7.0
40"	1.0	1.2	52.0	9.0
50"	1.3	1.5	65.0	11.0
60"	1.5	1.9	78.0	13.0
70"	1.8	2.2	91.0	15.0
80"	2.1	2.5	105.0	17.0
90"	2.3	2.8	118.0	20.0
100"	2.6	3.1	131.0	22.0
120"	3.1	3.7	157.0	26.0
150"	3.9	4.7	196.0	33.0
200"	5.2	6.2	261.0	44.0
250"	6.5	7.8	327.0	54.0
300"	7.8	9.3	392.0	65.0



HITACHI DIGITAL MEDIA, Hitachi Europe Ltd, Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire SL6 8YA UNITED KINGDOM
Tel: +44 (0)1628 585 000 Fax: +44 (0)1628 585 500 www.hitachidigitalmedia.com

The specification above and photography is for reference only and may be subject to change.

OPTICAL

LCD Panel		0.63" (1.6cm) P-Si TFT x 3
Resolution		XGA: 1024 x 768 colour pixels
Brightness	Normal Mode	2000 ANSI Lumens
	Eco Mode	1500 ANSI Lumens
Contrast Ratio		500:1
Lens		Manual zoom (F=1.8-1.9) 1:1.2
Lamp		160W UHB
Lamp Life		3000hrs
Distance to Width Ratio (:1)		1.3 (Wide), 1.5 (Tele)
Diagonal Display Size		30 ~ 300" (60"@1.5m, Wide)
Number of Colours		8bit/colour, 16.7Mcolours
Keystone Correction		Auto vertical keystone

COMPATIBILITY

Computer Compatibility	VGA, SVGA, XGA, WXGA, SXGA, SXGA+, UXGA, MAC 16"
Video Compatibility	NTSC/PAL/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p(720p@60Hz), 1125i(1080i@50/60Hz)
Plug & Play	DDC2B
Frequency Range	Horizontal: 31.5-106KHz, Vertical 56-120Hz

FEATURES

Speakers	1 x 1W
Other	Vertical Digital Keystone Correction: ±30degrees, Auto Vertical Digital Keystone Correction: ±30degrees, Mirror Reverse Image, Up-side Down Image, Freeze, Magnify, Blank, Digital Gamma Correction, Colour temperature Adjustment, Picture mode (Normal, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Progressive (Video/S-Video signal, Component video of Whiteboard), Component video of 525i(480i), 625i(576i), 2-3 Pull Down for NTSC, Video noise reduction, Overscan (Video, S-Video, Component signal), Resolution setting, Resolution setting, Audio ports assign, Source naming, Quick start (3 Seconds), Frame Lock, Auto signal search, Instant off, Auto signal search, MyScreen PIN-Lock, Transition detector, PIN Security Lock, PC Less Presentation MENU: 17 Languages
OSD Languages	MENU: 17 Languages

CONNECTIONS

Computer Input	15-pin Mini D-sub x 1
Video Input	Composite x 1 S-Video Jack x 1 Component x 1 (shared with D-sub1)
Audio Input	Stereo Mini Jack x 1
Audio Output	Stereo Mini Jack x 1
Control & Mouse	USB type B x 1 for mouse control
Storage media port	USB type A (USB 1.1) x 1
Network	RJ-45 (100BASE-TX) x 1 SD slot x 1 (for wireless network and storage)
Wireless standard	IEEE802.11b/g

POWER

Power Supply	100-120V/220-240V
Power Consumption	250W

PHYSICAL

Dimensions (W x H x D)	274 x 65 x 205mm (excluding feet and extrusions)
Weight	1.8kg (4lbs)
Noise Level	35dB (normal mode)/29dB (whisper mode)
Air Filter	MUO3602

MISCELLANEOUS

Lamp Indicator Light, Power Light, Ceiling Mount Image, Rear Projection Image

CERTIFICATION

CE approval, EN61000-3-2, EN61000-3-3, EN55022, EN55024, EN60950, Low voltage directive, WEEE

ACCESSORIES SUPPLIED

RGB Cable, Remote Control, Batteries, Lens Cap, Strap, Soft Case, Filter cover (for ceiling mounting), Power cord, 14 Language user's manuals, Security label, SD wireless network card, SD slot cover, Application software for wireless network

OPTIONAL ACCESSORIES

Replacement Lamp	DT00781
------------------	---------