

X1 PRO[®]


4K seamless switcher



Key Features

- 1U frame style
- EDID management
- Independent scaling
- Matrix for input and output
- Seamless switching
- 8K1K or 4K2K pixel-to-pixel input

Dimensions

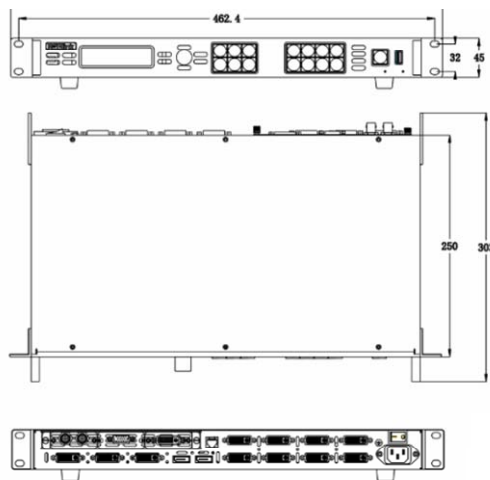

Order Codes

Product Code	Item
110-0001-21-0	VENUS X1 PRO [®]

Specification

Ports	Input	Standard	1 × Single Link DVI with loop [HDMI not supported] 1 × Dual Link DVI [HDMI supported] 1 × DisplayPort with loop 3 × Slots
		Options	Choose from HDMI, DVI, VGA, CVBS, 3G-SDI, USB, Audio Management (3 slots)
	Output	Standard	4 × DVI 4 × DVI (backup/loop)
		Communication	RS232 USB Upgrade program with USB flash disk
Performance	Input resolution	DVI:	VESA: 800x600 1024x768 1280x1024 1600x1200 1920x1080 1920x1200 2048x1152 SMPTE: 480i 576i 720p 1080i 1080p 4K 1K 2160p
		HDMI:	VESA: 800x600 1024x768 1280x720 1280x800 1280x960 1280x1024 1400x1050 1600x1200 1920x1080 1920x1200 2048x1152 2560x1600 3840x1080 3840x2160
		DP:	SMPTE: 480i 576i 720p 1080i 1080p 4K1K 2160p VESA: 800x600 1024x768 1280x720 1280x800 1280x960 1280x1024 1400x1050 1600x1200 1920x1080 1920x1200 2048x1152 2560x1600 3840x1080 3840x2160
		SDI:	480i 576i 720p 1080i 1080p 1080psf
	Output resolution	VGA:	800x600 1024x768 1280x1024 1600x1200 1920x1080 1920x1200
		Refresh rate:	23.98/24/25/29.97/30/50/59.94/60Hz SMPTE: 720p 1080p
	Standard supported	VESA:	800x600 1024x768 1280x720 1280x800 1280x960 1280x1024 1400x1050 1600x1200 1920x1080 1920x1200 2048x1152
		* User defined resolutions are available.	
		SDI:	3G-SDI
		VGA:	VGA-LUXGA
Power	Input voltage	AC 100~264V (typical value: 110/220); 50/60Hz	
	Max power	65W	
Environment	Temperature	-25°C~55°C (typical value: 25°C)	
	Humidity	20%~90%RH	
Physical	Weight	2.7kg (net weight) 6.3kg (package weight)	
	Dimensions	480mm x 303mm x 45mm (net dimension)	
		535mm x 355mm x 130mm (package dimension)	

Application

